


## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

|                        |            |
|------------------------|------------|
| <b>Creation Date:</b>  | 05/09/2018 |
| <b>Datasheet No:</b>   |            |
| <b>Parker Part No:</b> | 934600Q    |
| <b>OEM:</b>            | Hilco      |
| <b>OEM Part No:</b>    | PH718      |

### Product Dimensions

|               |       |               |       |
|---------------|-------|---------------|-------|
| <b>A (mm)</b> | 152.9 | <b>(inch)</b> | 6.02  |
| <b>B (mm)</b> | 65.0  | <b>(inch)</b> | 2.56  |
| <b>C (mm)</b> | 65.0  | <b>(inch)</b> | 2.56  |
| <b>D (mm)</b> | 152.9 | <b>(inch)</b> | 6.02  |
| <b>E (mm)</b> | 455.9 | <b>(inch)</b> | 17.95 |

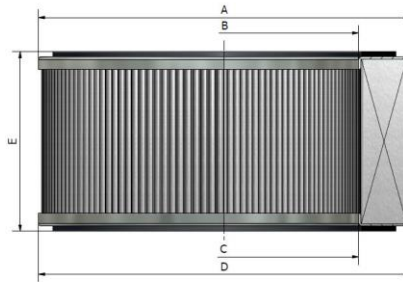

### Construction Materials

|                                |  |
|--------------------------------|--|
| <b>Seal(s):</b>                | NBR: Nitrile   |
| <b>Top Endcap:</b>             | Steel  |
| <b>Bottom Endcap:</b>          | Steel  |
| <b>Inner Support Cylinder:</b> | Steel tin plated   |
| <b>Filter Media:</b>           | Multilayer fiberglass with epoxy coated mesh on both sides |

### Calculated Performance Criteria

|   |   |
|---|---|
| <b>Differential Pressure (<math>\Delta p</math>):</b> | bar @ l/min   |
| <b>Tested to ISO3968 @ 32 cSt</b>                     | psi @ gpm   |
| <b>Efficiency</b>                                     | >Beta 200 @ N/A microns & greater<br>>Beta 1000 @ 4 microns & greater |
| <b>Minimum Collapse Pressure:</b>                     | >7 bar  |
| <b>Tested to ISO2941</b>                              | >100 psi  |
| <b>Dirt Holding Capacity acc. to ISO16889</b>         |   |